

LAVA

Stone effect embossed surface
Superficie gofrata con effetto pietra
Surface gaufrée aspect pierre
Geprägte Oberfläche mit Steinoptik
Superficie gofrada con aspect piedra

standard flooring
3,0 mm
4,7 kg/m²



T 610 × 610 mm

R 1,90 × 10 m



Classification UPEC **U₁ P₃ E_{2/3} C₁₀**
* Classified **C₁** if greasy substances are not used

X-Elastic acoustic flooring
5,0 mm
5,3 kg/m²



R 1,90 × 10 m




Classification UPEC **U₁ P₃ E_{1/2} C₁₀**
* Classified **C₁** if greasy substances are used



L 15 Hekla




L 16 Erebus

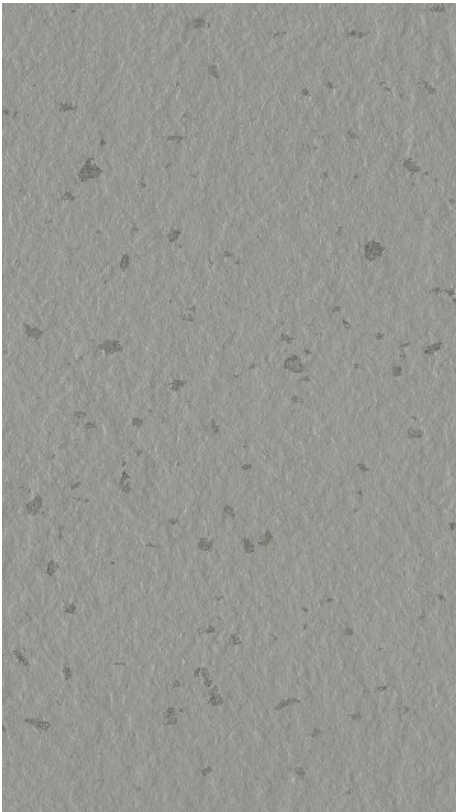


L 17 Sajama



L 19 Kronotsky

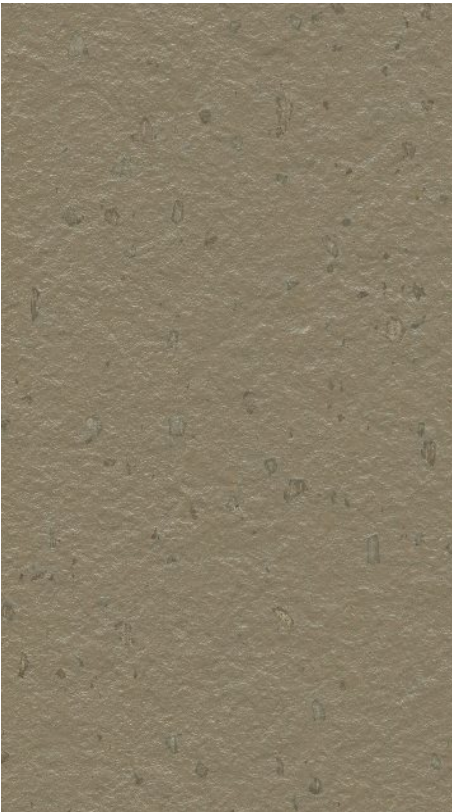


L 03 Vesuvio

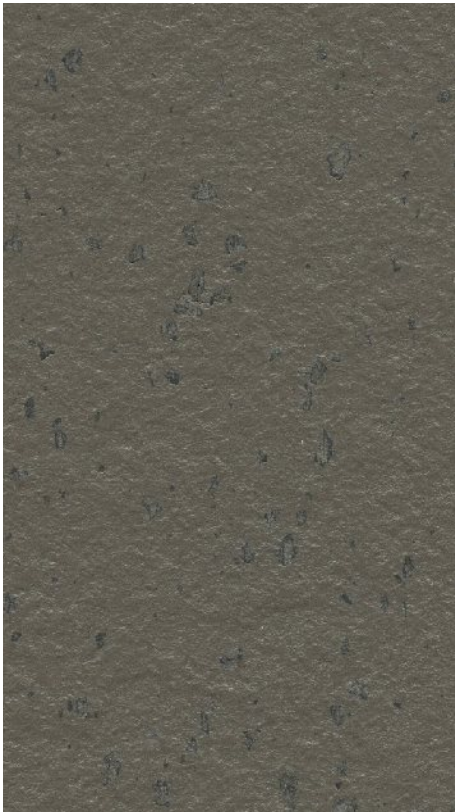

L 02 Teide



L 18 Meru

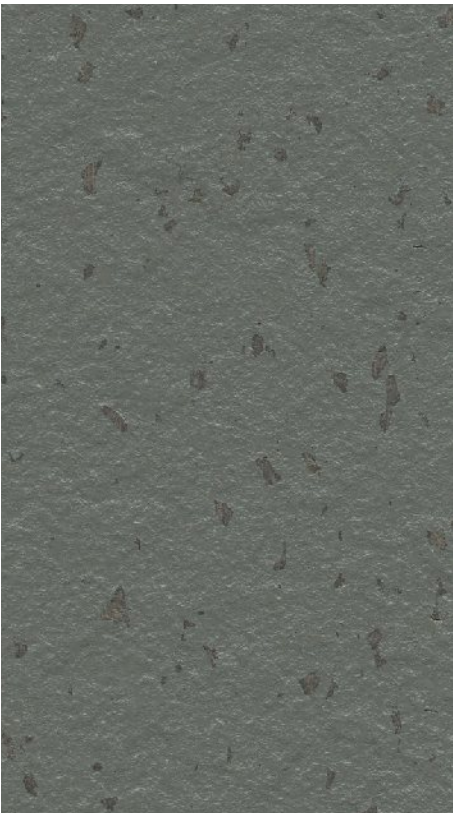

L 06 Fuji



L 01 Merapi



L 05 Etna